




## MAXGARD® 400

UV STABILIZER FOR PLASTICS AND COATINGS

### TECHNICAL INFORMATION

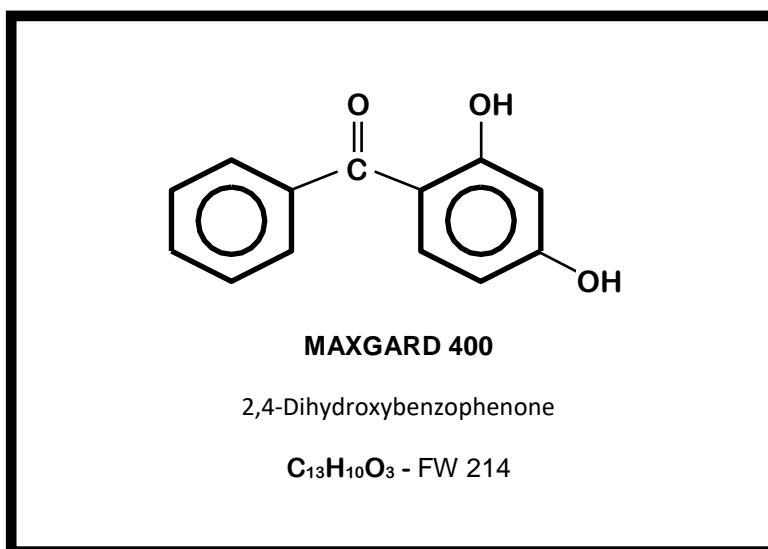

**MAXGARD 400** is effective for protecting coatings and plastics from the damaging ultraviolet radiation which is a component of natural sunlight. It is soluble in a wide range of solvents and is compatible with most polymers.

When **MAXGARD 400** is added to a plastic or coating system, it imparts less color to the substrate than most other UV stabilizers.

### APPLICATIONS

**Plastics** - Polystyrene, acrylic sheet, epoxy and unsaturated polyesters.

**Coatings** – Nitrocellulose lacquers, varnishes.

**Adhesives** – Pressure sensitive acrylic adhesives.

**Textiles** – Dyed polyester fabrics.

# MAXGARD® 400

UV STABILIZER FOR PLASTICS AND COATINGS


## PHYSICAL AND CHEMICAL PROPERTIES

**Physical Form** – Off white powder

**Melting Range** – 144 - 146°C

**Mass Density** -1.27 g/cm<sup>3</sup> at 25°C

**Std. K-Value** - 65 at 288nm

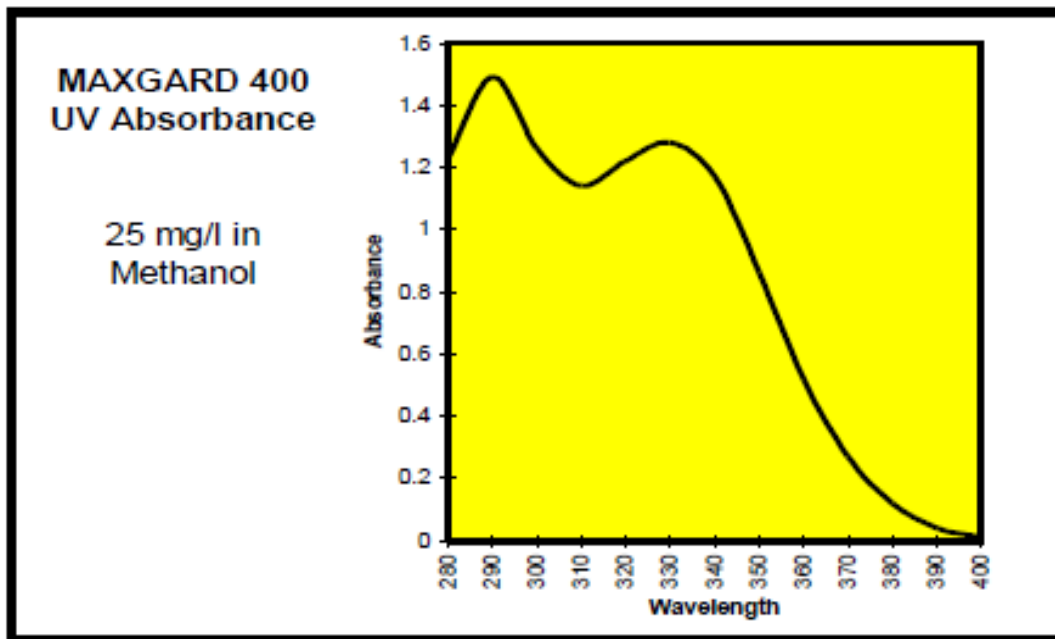

## PACKAGING, SHIPPING & AVAILABILITY

The product is available in 25kg fiber drums (8 drums per pallet).

“The information contained in this bulletin is based on information received of our staff and of others and is presented in good faith and with every belief in its accuracy. Due to the extensive technology involved in its usage, the manufacturer does not guarantee such information, nor does Lycus make any recommendations as to its use in the infringement of any patent. The information contained in this bulletin supersedes and replaces all information contained in all previous bulletins. Seller makes no warranty of any kind, expressed or implied, except that the goods sold hereunder shall meet the specifications of the buyer. Users are responsible for determining the effectiveness of stabilizers in their specific applications.”