




## MAXGARD® 600

UV Stabilizer for plastics and coatings.

### TECHNICAL INFORMATION

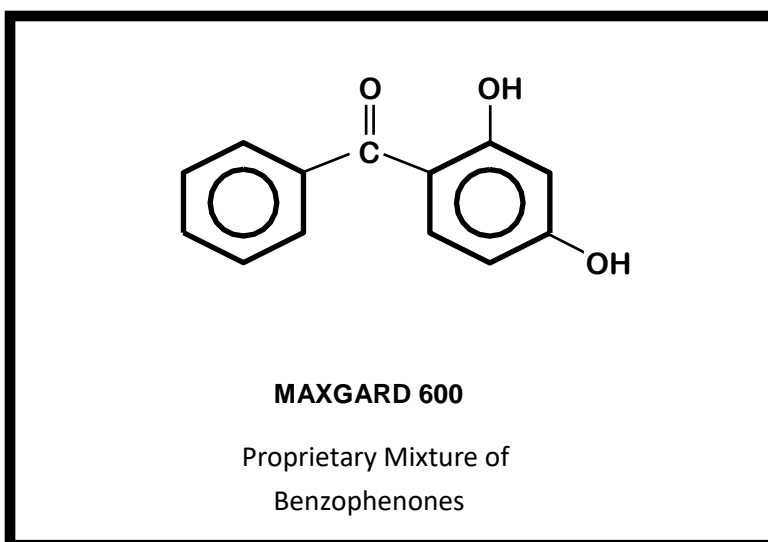

**MAXGARD 600** is an effective 100% active liquid light stabilizer for use in plastics and coatings. It is miscible with a large number of common solvents and plasticizers which makes it easy to incorporate into many systems.

### APPLICATIONS

**Plastics** – Flexible and Rigid PVC, PVC plastisol's, liquid color formulations.

**Coatings** – Polyurethanes.

**Adhesives** – Vinyl and Acrylic.

# MAXGARD® 600

UV Stabilizer for plastics and coatings.


## PHYSICAL AND CHEMICAL PROPERTIES

**Physical form** – Pale yellow liquid, 100% active.

**Melting Point** - ~5°C

**Mass Density** – 1.27 g/cm<sup>3</sup> at 25°C

**Std. K-Value** - 51 at 288nm

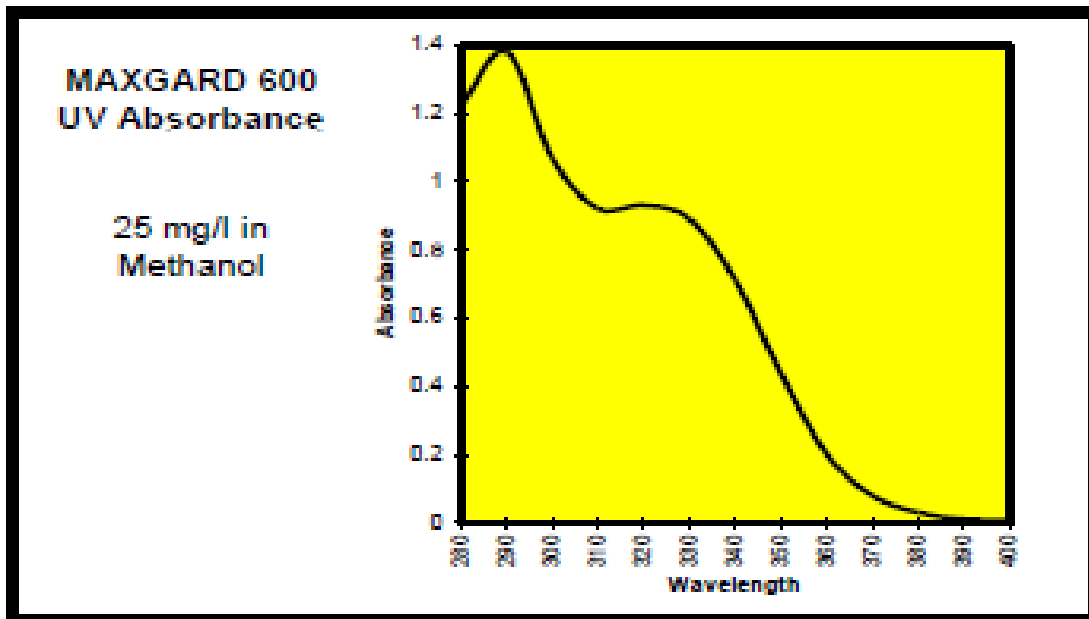

## PACKAGING, SHIPPING & AVAILABILITY

The standard package size of **Maxgard® 600** is available in 200kg Drums (4 drums per pallet).

“The information contained in this bulletin is based on information received of our staff and of others and is presented in good faith and with every belief in its accuracy. Due to the extensive technology involved in its usage, the manufacturer does not guarantee such information, nor does Lycus make any recommendations as to its use in the infringement of any patent. The information contained in this bulletin supersedes and replaces all information contained in all previous bulletins. Seller makes no warranty of any kind, expressed or implied, except that the goods sold hereunder shall meet the specifications of the buyer. Users are responsible for determining the effectiveness of stabilizers in their specific applications.”