




MAXGARD® 600

UV Stabilizer for plastics and coatings

Technical Information

181 Cooper Drive
El Dorado, AR 71730
(870)881-5000

MAXGARD 600 is an effective 100% active liquid light stabilizer for use in plastics and coatings. It is miscible with a large number of common solvents and plasticizers which makes it easy to incorporate into many systems.

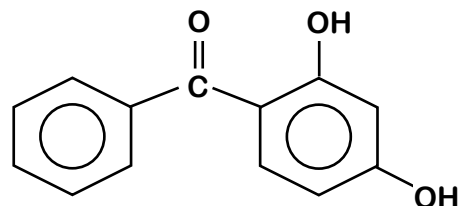

MAXGARD 600

Proprietary Mixture of Benzophenones

Applications


Plastics - Flexible and rigid PVC, PVC plastisols, liquid color formulations

Coatings - Polyurethanes

Adhesives - vinyl and acrylic

MAXGARD 600
UV Absorbance

25 mg/l in
Methanol

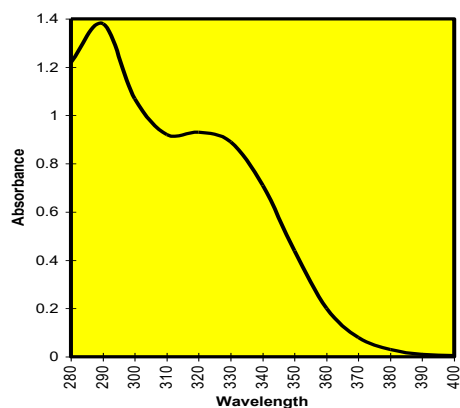

Physical and Chemical Properties

Physical form - Pale yellow liquid, 100% active

Melting Range - ~ 5°C

Mass Density - 1.27 g/cm³ at 25°C

Std. K-Value - 51 at 288nm



The product is available in 200kg Drums (4 drums per pallet).

"The information contained in this bulletin is based on information received of our staff and of others and is presented in good faith and with every belief in its accuracy. Due to the extensive technology involved in its usage, the manufacturer does not guarantee such information, nor does he make any recommendations as to its use in the infringement of any patent. The information contained in this bulletin supersedes and replaces all information contained in all previous bulletins. Seller makes no warranty of any kind, expressed or implied, except that the goods sold hereunder shall meet the specifications of the buyer. Users are responsible for determining the effectiveness of stabilizers in their specific applications."