



# MAXGARD DPA-8


UV Stabilizer (6197-30-4) Octocrylene

## Technical Information

181 Cooper Drive  
El Dorado, AR 71730  
(870)881-5000

**MAXGARD DPA-8** is very effective at protecting plastics, coatings and adhesives from the damaging ultraviolet radiation found in sunlight. It is compatible with all major PVC plasticizers and easily incorporated into liquid systems.

**MAXGARD DPA-8** is a 100 percent active liquid light stabilizer which has low color, extremely low volatility, and does not react with other additives or pigments.

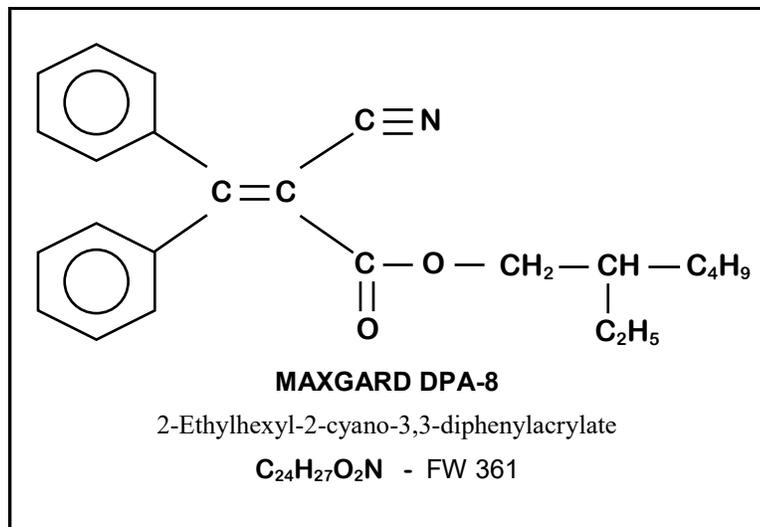

## Applications


**Plastics** - PVC Plasticsols, Plasticized PVC, Liquid Color Formulations

**Coatings** - Varnishes, Nitrocellulose and Other Lacquers, Polyurethanes, Acrylics, Polyester Gel-Coats and Inks

**Adhesives** - Acrylic and Vinyl.

**MAXGARD DPA-8**  
UV Absorbance

25 mg/l in  
Methanol

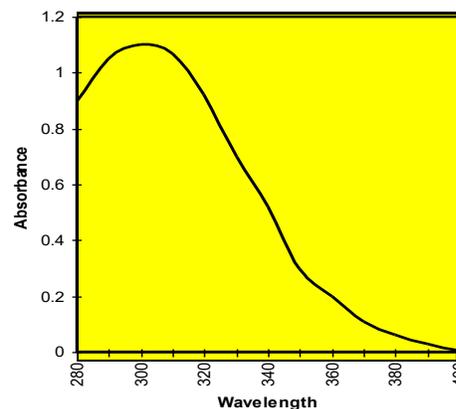

## Physical and Chemical Properties

**Physical form** - clear, light amber, viscous liquid

**Solidification Point** -10°C

**Boiling Point** - 218°C at 2 mbar

**Mass Density** - 1.05g/cm<sup>3</sup> at 25°C

**Std. K-Value** - 36 at 303nm



The product is available in 200kg Steel Drums (4 drums per pallet).

"The information contained in this bulletin is based on information received of our staff and of others and is presented in good faith and with every belief in its accuracy. Due to the extensive technology involved in its usage, the manufacturer does not guarantee such information, nor does he make any recommendations as to its use in the infringement of any patent. The information contained in this bulletin supersedes and replaces all information contained in all previous bulletins. Seller makes no warranty of any kind, expressed or implied, except that the goods sold hereunder shall meet the specifications of the buyer. Users are responsible for determining the effectiveness of stabilizers in their specific applications."